

Grippul

Quick gripping and extracting
hydraulic stub puller

Maintenance

Stub puller



A winning story since 1961

The Beginning

At the end of the 1950s, Domenico Franco Agostino became the Italian representative of Albert Otto, a German manufacturer of tube expanders. In 1961 Franco Agostino's Albert Otto Italiana was founded and in 1972, after purchasing an area of 10,000 square metres in the municipality of Bagnolo Cremasco, Maus Italia Sas was established.

The Growth

In 1976 his son Stefano, a mechanical engineer, joined the company. Together with his father, he studied products, introduced new machinery onto the market and filed the first patents by Maus Italia. Above all, Stefano was firmly convinced that people are the very heart of a company's success. Therefore, he invested in human capital by valuing people and roles, and he surrounded himself with skilled operators as well as technical, commercial and administrative collaborators. The result was a winning, competent and proactive team.

His daughter Anna - also a mechanical engineer - has been working in the company since 2016, giving new impetus and energy to the business her father and grandfather had built.

Father and daughter work together side by side every day to guarantee the excellence of Maus Italia and support all customers worldwide with competence and passion: the company's distinctive traits.



Stefano Agostino

CEO - Mechanical Engineer

Anna Agostino

COO - Mechanical and Management Engineer



In-house production of each component Workshop 4.0 and 24/7 production control

The production of Maus Italia branded items is entirely carried out in Bagnolo Cremasco, in the heart of an Italian industrial area 30 km southeast of Milan.

The company boasts a 4.0 workshop equipped with state-of-the-art machinery, an in-house heat treatment room and a final inspection department that allow Maus Italia to independently manage every phase of the manufacturing process of its wide range of products whilst maintaining high quality standards.



Quality first. Design and development

One of Maus Italia's strengths is its willingness to understand its customers' needs.

Our technical department is always ready to find operational solutions to the most complex applications, even via feasibility studies. We develop accurate work processes, draw with FEM analyses to verify our mechanical-structural performance and optimise the manufacturing process of each component.

Quality, environment and safety policy

Research, quality and safety are the watchwords of Maus Italia Spa.

Maus Italia has several projects underway aimed at increasingly sustainable development and integrates environmental concerns into its business model. The company's actions, behaviour and development choices are focused not only on the short run but rather mainly on a medium and long-term horizon.



Ready To Deliver

A well-stocked and complete warehouse of finished products enables Maus Italia ship quickly to customers all over the world according to a ready-to-deliver logic.

The warehouse is fully located within our premises in Bagnolo Cremasco at controlled temperatures and conditions to guarantee the maximum safety and quality of Maus Italia products for all our customers.

Every day in over 80 country worldwide

Find an official distributor in your country





Grippul

*Quick gripping and extracting
hydraulic stub puller*

The quick gripping stub pullers of the Grippul line are the result of more than forty years of experience in tube extraction gathered by Maus Italia. Grippul was designed and manufactured for quick extraction of stubs from tube sheets.

Grippul, electrically or pneumatically operated versions, is equipped with remote control and it is available in two models depending on the extraction force (Grippul 11 and Grippul 21).

In combination with BundleCut or Kattex, it facilitates and speeds up the recovery of tube sheets.



Quick

From 4 to 6 extractions per minute



Flexible

Tolerance up to 1 mm (0.04") of tube inner diameter



Inexpensive

Low tool consumption




High quality

Tube sheet hole protection

The extraction process

Each component was designed according to the most modern and up-to-date technology, especially by analysing the continuous feedbacks we receive from our demanding customers.

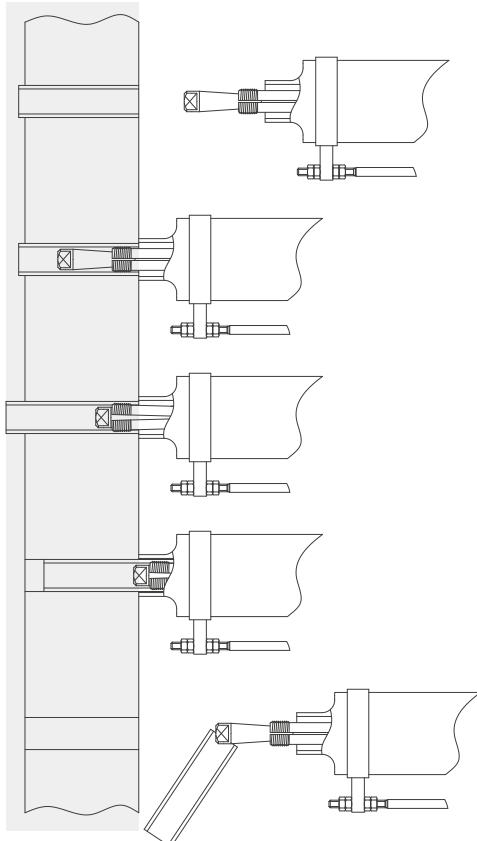

1 Positioning

2 Insertion

3 ABTS - Assisted quick connection (Anti-Breaking Tie-Rod System)

4 Extraction

(maximum extraction force 10000 Kg / 22000 lb with GRIPPUL 11 and 20000 Kg / 44000 lb with GRIPPUL 21)

5 Quick stub release



| Features that make the difference




|ABTS

The Anti-Breaking Tie-Rod System allows the force with which the jaw penetrates the tube to be regulated to suit the tube's diameter and the material of which it is made. This device means the system is unaffected by the difference in inside diameter of, as much as 1 mm (0.04"), between tubes in the same sheet, preventing tie-rod breakage.



|OPS

The electric Over-Pressure Switch cuts off hydraulic fluid delivery when the piston reaches the end of its stroke, preventing unnecessary overpressure in the system.

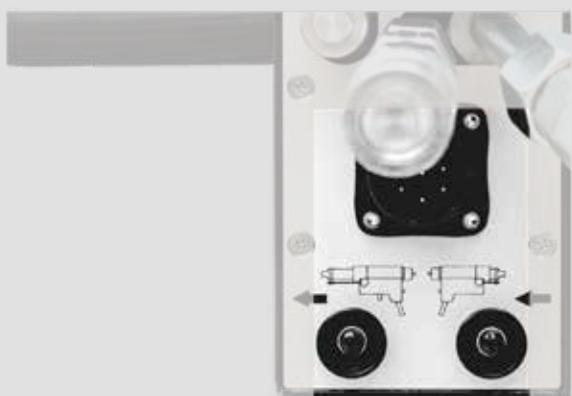


|RC24

The RC24 remote control beside the knobs simplifies and speeds up stub extraction. In the electric version it is powered at low voltage 24 Volts.



|RSR

The Revolving Support Ring on which the Grippul is suspended during use allows optimal positioning in the tightest spaces.

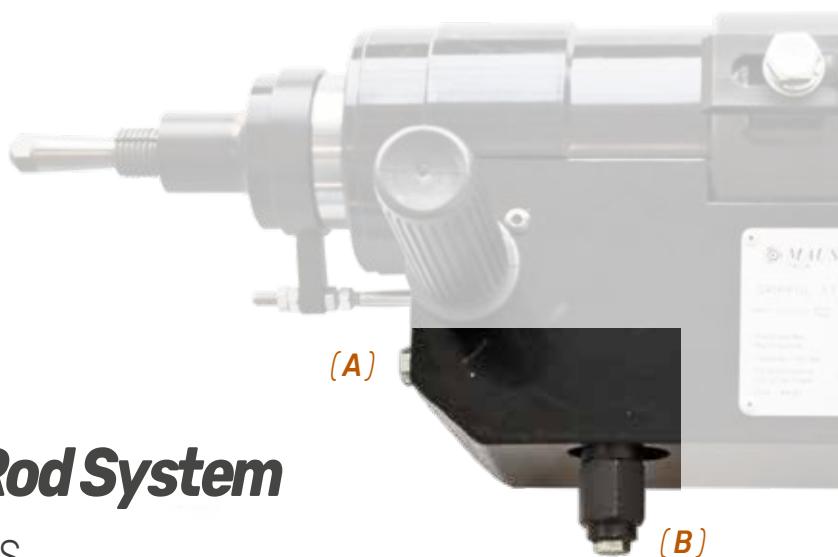

| Anti-Breaking Tie-Rod System

SAVING AND SAFEGUARDING TOOLS

The Anti-Breaking Tie-Rod System allows the force with which the jaw penetrates the tube to be regulated to suit the tube's diameter and the material of which it is made. This device means the system is unaffected by the difference in inside diameter of, as much as 1 mm (0.04"), between tubes in the same sheet, preventing tie-rod breakage.



GRIPPUL 11 and GRIPPUL 21 are equipped with a set of screws of different lengths stored in the front support **A** to prevent them from being lost.

Depending on which screw is assembled on the hydraulic oil pressure regulating valve **B**, a different gripping force of the jaw is achieved in the stub to be pulled out.

Grippul 11

| Forza Power (Kgf) | Pressione Pressure (bar) | L (mm) |
|-------------------|--------------------------|--------|
| 1500 | 75 | 6,80 |
| 2000 | 100 | 7,50 |
| 3000 | 150 | 8,75 |
| 4000 | 200 | 9,30 |
| 5000 | 250 | 9,80 |

Grippul 21

| Forza Power (Kgf) | Pressione Pressure (bar) | L (mm) |
|-------------------|--------------------------|--------|
| 1500 | 50 | 5,50 |
| 2000 | 75 | 6,80 |
| 3000 | 100 | 7,50 |
| 4000 | 150 | 8,75 |
| 5000 | 225 | 10,40 |
| | 300 | 11,90 |




The hydraulic oil pressure can be monitored by the help of the supplied manometer.



Over Pressure Switch

The electric Over-Pressure Switch cuts off hydraulic fluid delivery when the piston reaches the end of its stroke, preventing unnecessary overpressure in the system.

A rigid shaft mounted on the inner piston via a ring slides into the microswitch holder controlling the interruption of the hydraulic oil supply.

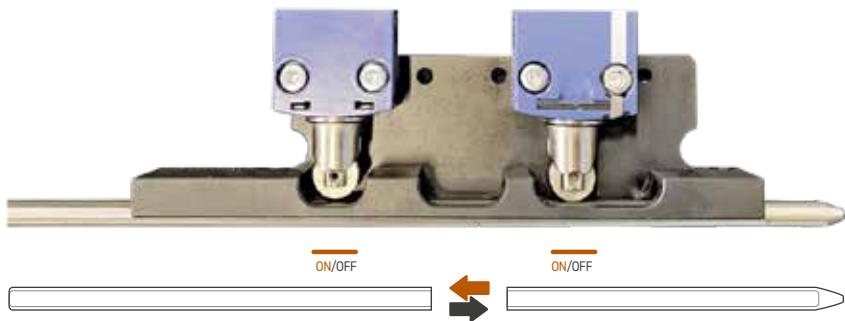

High Pressure Hydraulic Hoses

High Pressure Hydraulic Hoses, 6 m (19.7 ft) long, are certified for use up to 350 bar (5075 psi). They are equipped with FLAT fittings that reduce dripping during connection and disconnection from GRIPPUL and hydraulic power TP10 unit. They are also equipped with safety systems that prevent a whip effect in the event of a broken hose-fitting connection (Anti-Whip hoses).



Grippul E

| Electric version




Grippul 11E

| | |
|-------------------------------|--------------------------------|
| > Tube (min < de > max) | 12,7 ÷ 38,1 mm / 1/2" ÷ 1 1/2" |
| > Maximum extraction force | 10000 Kg / 22000 lb |
| > Piston stroke | 120 mm / 4.72" |
| > Max pressure | 350 bar / 5075 psi |
| > Remote control power supply | 24 V |

> Dimensions:

| | |
|---------|----------------|
| Width: | 500 mm / 19.7" |
| Depth: | 113 mm / 4.5" |
| Height: | 270 mm / 10.6" |

| | |
|----------|---------------|
| > Weight | 23 Kg / 51 lb |
| > Case | |



| | |
|---------------|-----------------|
| Width: | 78 cm / 2.60 ft |
| Depth: | 48 cm / 1.57 ft |
| Height: | 50 cm / 1.64 ft |
| Gross weight: | 48 Kg / 106 lb |


Grippul 21E

| | |
|-------------------------------|------------------------------|
| > Tube (min < de > max) | 25,4 ÷ 63,5 mm / 1" ÷ 2 1/2" |
| > Maximum extraction force | 20000 Kg / 44000 lb |
| > Piston stroke | 130 mm / 5.12" |
| > Max pressure | 350 bar / 5075 psi |
| > Remote control power supply | 24 V |

> Dimensions:

| | |
|---------|----------------|
| Width: | 600 mm / 23.6" |
| Depth: | 130 mm / 5.1" |
| Height: | 290 mm / 11.4" |

| | |
|----------|---------------|
| > Weight | 35 Kg / 75 lb |
| > Case | |



| | |
|---------------|-----------------|
| Width: | 78 cm / 2.60 ft |
| Depth: | 48 cm / 1.57 ft |
| Height: | 50 cm / 1.64 ft |
| Gross weight: | 60 Kg / 133 lb |




TP10 EVV


Semi-automatic hydraulic power unit

- › Max pressure: 350 bar/5075 psi
- › Oil flow rate: Lt/min (bar) US/gpm (psi)

| | |
|----------------|------------------------|
| 12 (0÷70) | 3.17 (0÷1015 psi) |
| 0,9 (70÷350) | 0.24 (1015÷5075 psi) |
- › Hydraulic oil (not supplied): 30Lt/8 US Gallon - Viscosità 46
- › Power supply: 1,1 Kw-230/400V-50/60 Hz-3 phase
- › Remote control power supply: 24V
- › IP: 30
- › Dimensions:
Width: 680mm / 26.8"
Depth: 500mm / 19.7"
Height: 720mm / 28.3"
- › Weight (without hydraulic oil): 86 Kg / 189 lb
- › Box (power unit + case)




Width: 113 cm / 3.70 ft
Depth: 93 cm / 3.05 ft
Height: 96 cm / 3.15 ft
Gross weight: 211 Kg / 465 lb

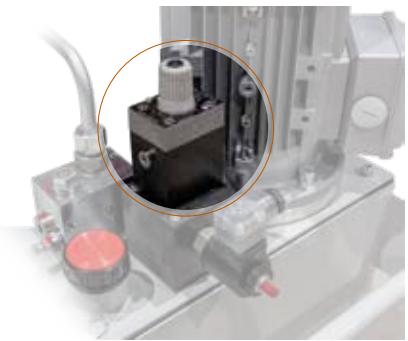

I FRAV

Flow Rate Adjustment Valve

The Flow Rate Adjustment Valve is required to regulate the flow of hydraulic oil to ensure the best gripping of the jaw in the tube.

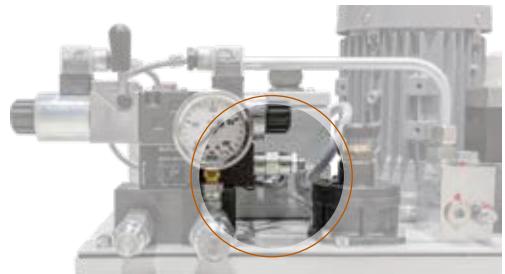

I PAV

Pressure Adjustment Valve

The Pressure Adjustment Valve is required to adjust the maximum hydraulic oil pressure when using a **TP10EVV** power unit with **KATTEX 6E** and **KATTEX 12E** hydraulic tube cutters



The **TP10EVV** power unit can also be used in combination with the semi-automatic hydraulic puller **ONLYPUL E**




Grippul P


|Pneumatic version



Grippul 11P

| | |
|---|---|
| > Tube (min < de > max) | 12,7 ÷ 38,1 mm / 1/2" ÷ 1 1/2" |
| > Maximum extraction force | 10000 Kg / 22000 lb |
| > Piston stroke | 120 mm / 4.72" |
| > Max pressure | 350 bar / 5075 psi |
| > Remote control power supply | 6,3 bar / 91.4 Psi |
| > Dimensions: | |
| Width: | 500 mm / 19.7" |
| Depth: | 113 mm / 4.5" |
| Height: | 270 mm / 10.6" |
| > Weight | 23 Kg / 51 lb |
| > Case | |
|  | Width: 78 cm / 2.60 ft Depth: 48 cm / 1.57 ft Height: 50 cm / 1.64 ft Gross weight: 48 Kg / 106 lb |

Grippul 21P

| | |
|--|---|
| > Tube (min < de > max) | 25,4 ÷ 63,5 mm / 1" ÷ 2 1/2" |
| > Maximum extraction force | 20000 Kg / 44000 lb |
| > Piston stroke | 130 mm / 5.12" |
| > Max pressure | 350 bar / 5075 psi |
| > Remote control power supply | 6,3 bar / 91.4 Psi |
| > Dimensions: | |
| Width: | 600 mm / 23.6" |
| Depth: | 130 mm / 5.1" |
| Height: | 290 mm / 11.4" |
| > Weight | 35 Kg / 75 lb |
| > Case | |
|  | Width: 78 cm / 2.60 ft Depth: 48 cm / 1.57 ft Height: 50 cm / 1.64 ft Gross weight: 60 Kg / 133 lb |



Flow Rate Adjustment Valve

The Flow Rate Adjustment Valve is required to regulate the flow of hydraulic oil to ensure the best gripping of the jaw in the tube.


TP10PVV

Semi-automatic hydraulic power unit

- Max pressure: 350 bar / 5075 psi
- Oil flow rate: Lt/min (bar) US/gpm (psi)

| | |
|----------------|------------------------|
| 12 (0÷70) | 3.17 (0÷1015 psi) |
| 0,9 (70÷350) | 0,24 (1015÷5075 psi) |
- Hydraulic oil (not supplied): 30Lt/8 US Gallon - Viscosità 46
- Power supply: 1,7 Kw - 7 bar (100 psi)
- Air consumption: 1900 Lt/min (67 Cfm) - 7 bar / 100 psi
- Dimensions:

Width: 680 mm / 26.8"
 Depth: 500 mm / 19.7"
 Height: 600 mm / 23.6"
- Weight (without hydraulic oil): 67,5 Kg / 149 lb
- Box (power unit + case)



| | |
|---------------|------------------|
| Width: | 113 cm / 3.70 ft |
| Depth: | 93 cm / 3.05 ft |
| Height: | 96 cm / 3.15 ft |
| Gross weight: | 192 Kg / 423 lb |



Pressure Adjustment Valve

The Pressure Adjustment Valve is required to adjust the maximum hydraulic oil pressure when using a **TP10EVV** power unit with **KATTEX 6P** and **KATTEX 12P** hydraulic tube cutters



The **TP10PVV** power unit can also be used in combination with the semi-automatic hydraulic puller **ONLYPUL P**



Equipment

- > Transport case
- > Grippul hydraulic puller
- > N°2 hydraulic hoses (length: 6 m)
- > Manometer
- > Set of spare gaskets
- > Set of service keys
- > Instruction manual



Transport case



Grippul hydraulic puller



No. 2 hydraulic hoses



Manometer




Set of spare gaskets



Set of service keys



Instruction manual

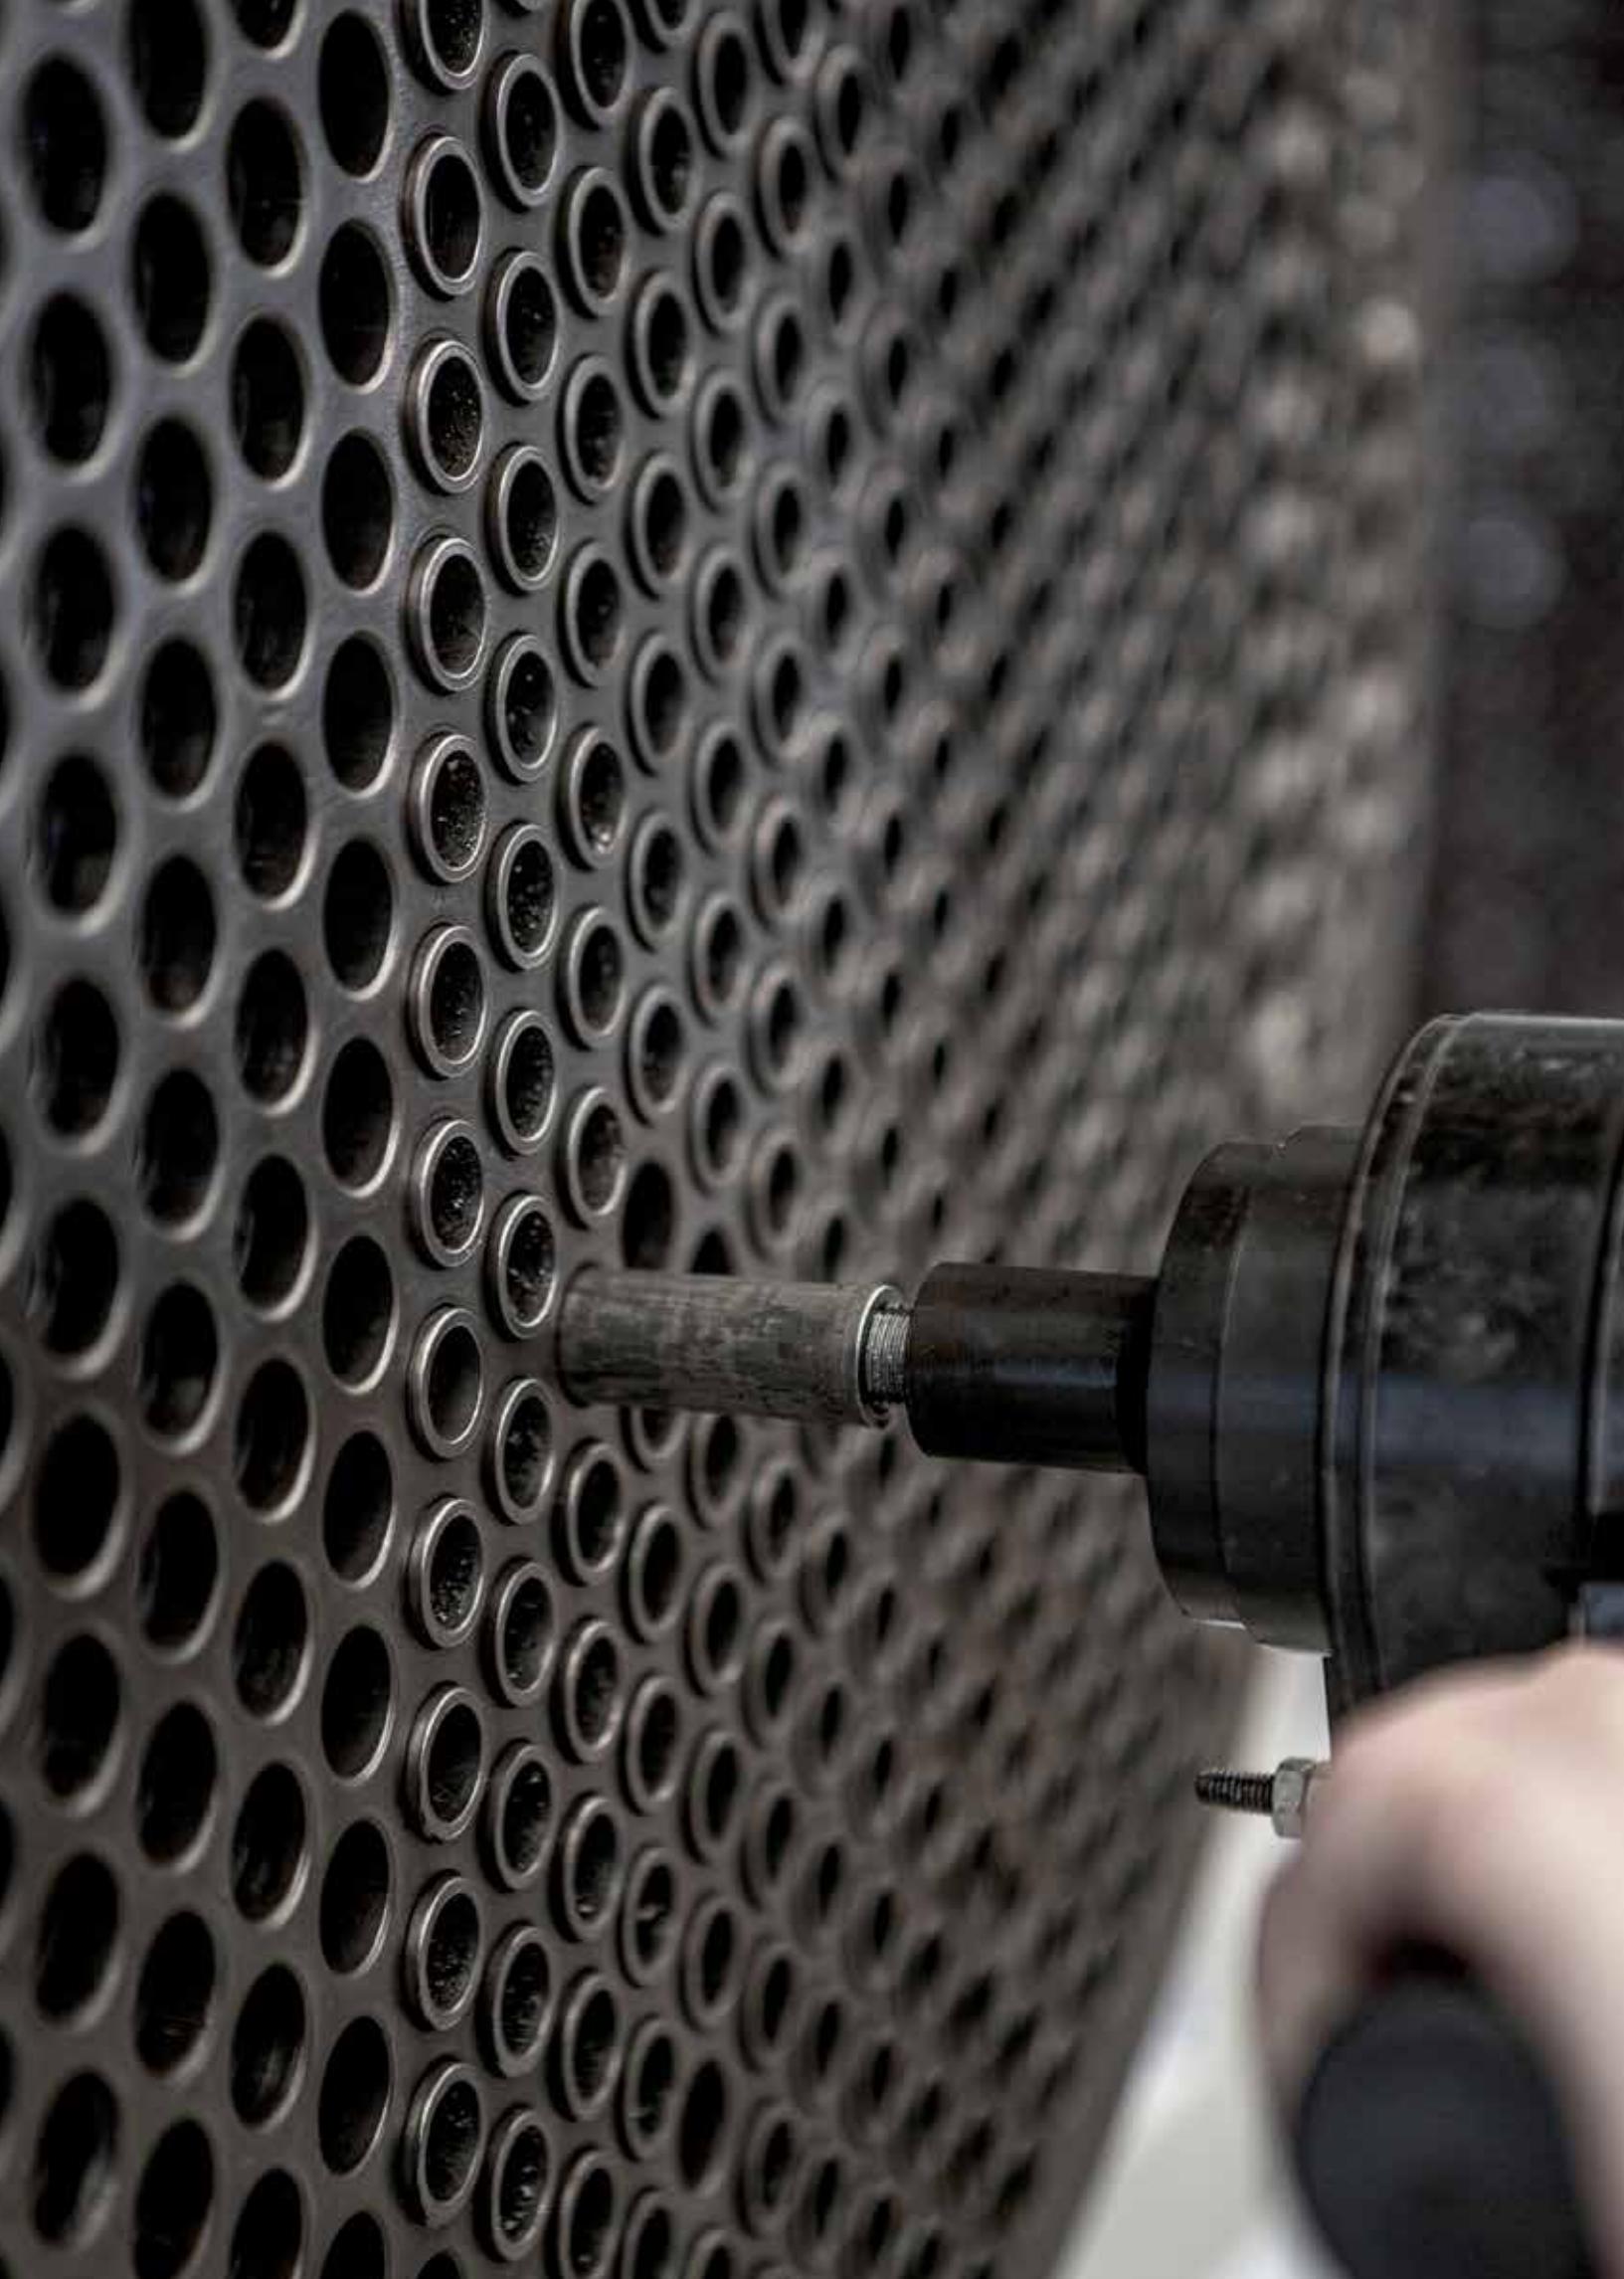

|| **Optionals**



|| **YRS** Set of spare parts


Model Set of spare parts for **2** years of working **Weight**

| | | |
|--------------|------------|-----------------|
| Grippul 11/E | G11E-YRS-2 | 2,5 kg / 5.5 lb |
| Grippul 11/P | G11P-YRS-2 | 2,5 kg / 5.5 lb |
| Grippul 21/E | G21E-YRS-2 | 2,7 kg / 6.0 lb |
| Grippul 21/P | G21P-YRS-2 | 2,7 kg / 6.0 lb |



|| **TPB** Balancers

| Model | Balancers | Range | Weight |
|--------------|------------------|---------------------|-------------------|
| Grippul 11/E | TPB10 | 22-25 Kg / 48-55 lb | 7,5 Kg / 16.1 lb |
| Grippul 11/P | TPB10 | 22-25 Kg / 48-55 lb | 7,5 Kg / 16.1 lb |
| Grippul 21/E | TPB20 | 30-35 Kg / 66-77 lb | 13,1 Kg / 28.9 lb |
| Grippul 21/P | TPB20 | 30-35 Kg / 66-77 lb | 13,1 Kg / 28.9 lb |

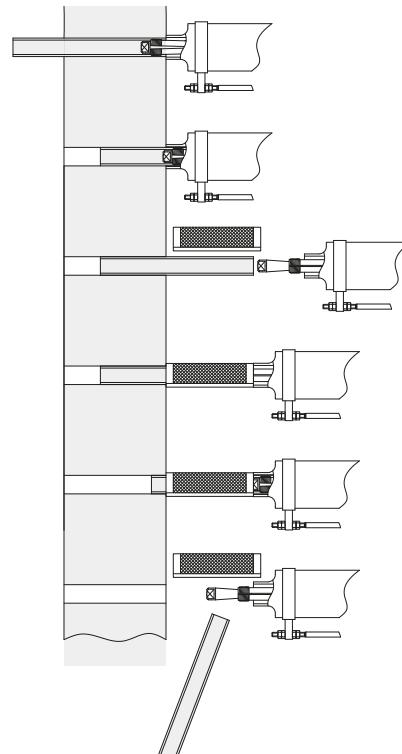

|| **PE** Extraction extension


| Tube | Extraction extension 120 mm | Extraction extension 240 mm |
|-------------|---|---|
| 5/8" | PE120-5/8" | PE240-5/8" |
| 3/4" | PE120-3/4" | PE240-3/4" |
| 7/8" | PE120-7/8" | PE240-7/8" |
| 1.1/4" | PE120-1.1/4" | PE240-1.1/4" |
| 1.1/2" | PE120-1.1/2" | PE240-1.1/2" |






Grippul 11

Tooltable



| Tube | | | | Expansion | | Jaw | | Cone | Tie-rod | Collar |
|----------------|----|----------------|------|-----------|------|---------------|-------------|-----------|------------|------------|
| d _e | sp | d _j | | inches | mm | inches | mm | Cod. | Cod. | Cod. |
| 1/2" (12,7) | 14 | 0.083 | 2,11 | 0.334 | 8,5 | 0.335 ÷ 0.393 | 8,5 ÷ 10,0 | G11J-02 | | |
| | 16 | 0.065 | 1,65 | 0.370 | 9,4 | | | | | |
| | 17 | 0.058 | 1,47 | 0.384 | 9,7 | 0.347 ÷ 0.433 | 9,5 ÷ 11,0 | G11J-02/A | G11C 02÷03 | G11T 02÷03 |
| | 18 | 0.049 | 1,24 | 0.402 | 10,2 | | | | | TPC-14 |
| | 19 | 0.042 | 1,07 | 0.416 | 10,5 | 0.393 ÷ 0.472 | 10,5 ÷ 12,0 | G11J-03 | | |
| | 20 | 0.035 | 0,89 | 0.430 | 10,9 | | | | | |
| 5/8" (15,9) | 14 | 0.083 | 2,11 | 0.459 | 11,7 | 0.452 ÷ 0.512 | 11,5 ÷ 13,0 | G11J-04 | | |
| | 15 | 0.072 | 1,83 | 0.481 | 12,2 | | | | | |
| | 16 | 0.065 | 1,65 | 0.495 | 12,6 | 0.492 ÷ 0.551 | 12,5 ÷ 14,0 | G11J-1 | G11C 04÷2 | G11T 04÷2 |
| | 18 | 0.049 | 1,24 | 0.527 | 13,4 | | | | | TPC-18 |
| | 19 | 0.042 | 1,07 | 0.541 | 13,7 | 0.551 ÷ 0.610 | 14,0 ÷ 15,5 | G11J-2 | | |
| | 20 | 0.035 | 0,89 | 0.555 | 14,1 | | | | | |
| | 22 | 0.028 | 0,71 | 0.569 | 14,5 | | | | | |
| 3/4" (19,0) | 12 | 0.109 | 2,77 | 0.532 | 13,4 | 0.531 ÷ 0.610 | 13,5 ÷ 15,5 | G11J-2/A | | |
| | 13 | 0.095 | 2,41 | 0.560 | 14,2 | | | | | |
| | 14 | 0.083 | 2,11 | 0.584 | 14,8 | 0.571 ÷ 0.650 | 14,5 ÷ 16,5 | G11J-3 | | |
| | 15 | 0.072 | 1,83 | 0.606 | 15,3 | | | | | |
| | 16 | 0.065 | 1,65 | 0.620 | 15,7 | 0.610 ÷ 0.689 | 15,5 ÷ 17,5 | G11J-4 | G11C 2/A÷8 | G11T 2/A÷8 |
| | 18 | 0.049 | 1,24 | 0.652 | 16,5 | | | | | TPC-21 |
| | 19 | 0.042 | 1,07 | 0.666 | 16,8 | 0.669 ÷ 0.748 | 17,0 ÷ 19,0 | G11J-5 | | |
| | 20 | 0.035 | 0,89 | 0.680 | 17,2 | | | | | |
| | 22 | 0.028 | 0,71 | 0.694 | 17,6 | | | | | |
| 7/8" (22,2) | 12 | 0.109 | 2,77 | 0.657 | 16,6 | 0.650 ÷ 0.728 | 16,5 ÷ 18,5 | G11J-6 | | |
| | 14 | 0.083 | 2,11 | 0.709 | 18,0 | | | | | |
| | 16 | 0.065 | 1,65 | 0.745 | 18,9 | 0.728 ÷ 0.807 | 18,5 ÷ 20,5 | G11J-7 | G11C 2/A÷8 | G11T 2/A÷8 |
| | 18 | 0.049 | 1,24 | 0.777 | 19,7 | | | | | TPC-25 |
| | 19 | 0.042 | 1,07 | 0.791 | 20,0 | 0.787 ÷ 0.866 | 20,0 ÷ 22,0 | G11J-8 | | |
| | 20 | 0.035 | 0,89 | 0.805 | 20,4 | | | | | |
| | 22 | 0.028 | 0,71 | 0.819 | 20,8 | | | | | |

Critical tube dimensions at the limit of extraction capacity for Grippul 11 (10,000 kg / 22,000 lb)
It depends on the tube material and on the expansion (tube sheet with or without grooves, length of expansion and expansion level)




| Tube | | | | Expansion | | Jaw | | Cone | Tie-rod | Collar | | |
|-----------------------------|------------------|-----------------------------|--------|-----------|--------|-----|---------------|-------------|----------|-------------|-------------|--------|
| <i>d_e</i> | <i>sp</i> | <i>d_i</i> | | | | | | | | | | |
| inches | mm | B.W.G | inches | mm | inches | mm | inches | mm | Cod. | Cod. | Cod. | Cod. |
| 1" (25,4) | 10 | 0.134 | 3,40 | 0.732 | 18,6 | | 0.728 ÷ 0.807 | 18,5 ÷ 20,5 | G11J-8/A | G11C 8/A÷11 | G11T 8/A÷20 | TPC-28 |
| | 12 | 0.109 | 2,77 | 0.782 | 19,8 | | 0.767 ÷ 0.846 | 19,5 ÷ 21,5 | G11J-9 | | | |
| | 13 | 0.095 | 2,41 | 0.810 | 20,6 | | 0.827 ÷ 0.906 | 21,0 ÷ 23,0 | G11J-9/A | | | |
| | 14 | 0.083 | 2,11 | 0.834 | 21,2 | | 0.866 ÷ 0.945 | 22,0 ÷ 24,0 | G11J-10 | | | |
| | 15 | 0.072 | 1,83 | 0.856 | 21,7 | | 0.925 ÷ 1.004 | 23,5 ÷ 25,5 | G11J-11 | | | |
| | 16 | 0.065 | 1,65 | 0.870 | 22,1 | | | | | | | |
| | 18 | 0.049 | 1,24 | 0.902 | 22,9 | | | | | | | |
| | 19 | 0.042 | 1,07 | 0.916 | 23,2 | | | | | | | |
| | 20 | 0.035 | 0,89 | 0.930 | 23,6 | | | | | | | |
| | 22 | 0.028 | 0,71 | 0.944 | 24,0 | | | | | | | |
| 1 1/4" (31,8) | 10 | 0.134 | 3,40 | 0.982 | 25,0 | | 0.964 ÷ 1.043 | 24,5 ÷ 26,5 | G11J-12 | G11C 12÷15 | G11T 8/A÷20 | TPC-34 |
| | 11 | 0.120 | 3,05 | 1.010 | 25,7 | | 1.043 ÷ 1.122 | 26,5 ÷ 28,5 | G11J-13 | | | |
| | 12 | 0.109 | 2,77 | 1.032 | 26,2 | | 1.102 ÷ 1.181 | 28,0 ÷ 30,0 | G11J-14 | | | |
| | 13 | 0.095 | 2,41 | 1.060 | 27,0 | | 1.161 ÷ 1.240 | 29,5 ÷ 31,5 | G11J-15 | | | |
| | 14 | 0.083 | 2,11 | 1.084 | 27,6 | | | | | | | |
| | 16 | 0.065 | 1,65 | 1.120 | 28,5 | | | | | | | |
| | 18 | 0.049 | 1,24 | 1.152 | 29,3 | | | | | | | |
| | 19 | 0.042 | 1,07 | 1.166 | 29,6 | | | | | | | |
| | 20 | 0.035 | 0,89 | 1.180 | 30,0 | | | | | | | |
| | 22 | 0.028 | 0,71 | 1.194 | 30,4 | | | | | | | |
| 1 1/2" (38,1) | 8 | 0.165 | 4,19 | 1.170 | 29,7 | | 1.161 ÷ 1.240 | 29,5 ÷ 31,5 | G11J-16 | G11C 16÷20 | G11T 8/A÷20 | TPC-41 |
| | 10 | 0.134 | 3,40 | 1.232 | 31,3 | | 1.240 ÷ 1.319 | 31,5 ÷ 33,5 | G11J-17 | | | |
| | 11 | 0.120 | 3,05 | 1.260 | 32,0 | | 1.299 ÷ 1.378 | 33,0 ÷ 35,0 | G11J-18 | | | |
| | 12 | 0.109 | 2,77 | 1.282 | 32,5 | | 1.358 ÷ 1.437 | 34,5 ÷ 36,5 | G11J-19 | | | |
| | 13 | 0.095 | 2,41 | 1.310 | 33,3 | | 1.417 ÷ 1.496 | 36,0 ÷ 38,0 | G11J-20 | | | |
| | 14 | 0.083 | 2,11 | 1.334 | 33,9 | | | | | | | |
| | 15 | 0.072 | 1,83 | 1.356 | 34,4 | | | | | | | |
| | 16 | 0.065 | 1,65 | 1.370 | 34,8 | | | | | | | |
| | 18 | 0.049 | 1,24 | 1.402 | 35,6 | | | | | | | |
| | 19 | 0.042 | 1,07 | 1.416 | 35,9 | | | | | | | |
| | 20 | 0.035 | 0,89 | 1.430 | 36,3 | | | | | | | |
| | 22 | 0.028 | 0,71 | 1.444 | 36,7 | | | | | | | |

Critical tube dimensions at the limit of extraction capacity for Grippul 11 (10,000 kg / 22,000 lb)
It depends on the tube material and on the expansion (tube sheet with or without grooves, length of expansion and expansion level)

Grippul 21

| Tooltable



| Tube | Expansion | | | Jaw | | Cone | Tie-rod | Collar | | | | | | |
|-----------------|-----------|-------|-------|--------|------|---------------|-------------|-----------------|--------------------|--------------------|---------------|--|--|--|
| | d_e | sp | d_j | | | | | | | | | | | |
| | inches | mm | B.W.G | inches | mm | inches | mm | Cod. | Cod. | Cod. | Cod. | | | |
| $3/4"$ (19,0) | 12 | 0.109 | 2,77 | 0.532 | 13,4 | 0.531 ÷ 0.610 | 13,5 ÷ 15,5 | G11J-2/A | G11C 2/A÷8 | G21T 2/A÷8 | TPC-21 | | | |
| | 13 | 0.095 | 2,41 | 0.560 | 14,2 | | | | | | | | | |
| | 14 | 0.083 | 2,11 | 0.584 | 14,8 | | | | | | | | | |
| $7/8"$ (22,2) | 15 | 0.072 | 1,83 | 0.606 | 15,3 | 0.571 ÷ 0.650 | 14,5 ÷ 16,5 | G11J-3 | | | | | | |
| | 16 | 0.065 | 1,65 | 0.620 | 15,7 | | | | | | | | | |
| | 18 | 0.049 | 1,24 | 0.652 | 16,5 | | | | | | | | | |
| | 19 | 0.042 | 1,07 | 0.666 | 16,8 | 0.610 ÷ 0.689 | 15,5 ÷ 17,5 | G11J-4 | | | | | | |
| | 20 | 0.035 | 0,89 | 0.680 | 17,2 | | | | | | | | | |
| | 22 | 0.028 | 0,71 | 0.694 | 17,6 | | | | | | | | | |
| $1"$ (25,4) | 7/8 | 0.109 | 2,77 | 0.657 | 16,6 | 0.650 ÷ 0.728 | 16,5 ÷ 18,5 | G11J-6 | G11C 2/A÷8 | G21T 2/A÷8 | TPC-25 | | | |
| | 14 | 0.083 | 2,11 | 0.709 | 18,0 | | | | | | | | | |
| | 16 | 0.065 | 1,65 | 0.745 | 18,9 | | | | | | | | | |
| $1 1/4"$ (31,8) | 18 | 0.049 | 1,24 | 0.777 | 19,7 | 0.728 ÷ 0.807 | 18,5 ÷ 20,5 | G11J-7 | | | | | | |
| | 19 | 0.042 | 1,07 | 0.791 | 20,0 | | | | | | | | | |
| | 20 | 0.035 | 0,89 | 0.805 | 20,4 | | | | | | | | | |
| | 22 | 0.028 | 0,71 | 0.819 | 20,8 | 0.787 ÷ 0.866 | 20,0 ÷ 22,0 | G11J-8/A | | | | | | |
| | 10 | 0.134 | 3,40 | 0.732 | 18,6 | | | | | | | | | |
| | 12 | 0.109 | 2,77 | 0.782 | 19,8 | | | | | | | | | |
| $1 1/2"$ (38,1) | 13 | 0.095 | 2,41 | 0.810 | 20,6 | 0.768 ÷ 0.846 | 19,5 ÷ 21,5 | G21J-9/A | G21C 8/A÷11 | G21T 8/A÷11 | TPC-28 | | | |
| | 14 | 0.083 | 2,11 | 0.834 | 21,2 | | | | | | | | | |
| | 15 | 0.072 | 1,83 | 0.856 | 21,7 | | | | | | | | | |
| | 16 | 0.065 | 1,65 | 0.870 | 22,1 | 0.827 ÷ 0.945 | 21,0 ÷ 24,0 | G21J-9/A | | | | | | |
| | 18 | 0.049 | 1,24 | 0.902 | 22,9 | | | | | | | | | |
| | 19 | 0.042 | 1,07 | 0.916 | 23,2 | | | | | | | | | |
| | 20 | 0.035 | 0,89 | 0.930 | 23,6 | 0.866 ÷ 0.984 | 22,0 ÷ 24,0 | G21J-10 | | | | | | |
| | 22 | 0.028 | 0,71 | 0.944 | 24,0 | | | | | | | | | |
| | 10 | 0.134 | 3,40 | 0.982 | 25,0 | | | | | | | | | |
| $2"$ (50,8) | 11 | 0.120 | 3,05 | 1.010 | 25,7 | 0.965 ÷ 1.083 | 24,5 ÷ 27,5 | G21J-12 | G21C 12÷15 | G21T 12÷15 | TPC-34 | | | |
| | 12 | 0.109 | 2,77 | 1.032 | 26,2 | | | | | | | | | |
| | 13 | 0.095 | 2,41 | 1.060 | 27,0 | | | | | | | | | |
| | 14 | 0.083 | 2,11 | 1.084 | 27,6 | 1.043 ÷ 1.161 | 26,5 ÷ 29,5 | G21J-13 | | | | | | |
| | 16 | 0.065 | 1,65 | 1.120 | 28,5 | | | | | | | | | |
| | 18 | 0.049 | 1,24 | 1.152 | 29,3 | | | | | | | | | |
| | 19 | 0.042 | 1,07 | 1.166 | 29,6 | 1.102 ÷ 1.220 | 28,0 ÷ 31,0 | G21J-14 | | | | | | |
| | 20 | 0.035 | 0,89 | 1.180 | 30,0 | | | | | | | | | |
| | 22 | 0.028 | 0,71 | 1.194 | 30,4 | | | | | | | | | |

Dimensioni critiche dei tubi al limite della capacità di estrazione del Grippul 21 (20000 Kg / 44000 lb)
Dipende dal materiale del tubo e dall'espansione (con o senza canalini nella piastra tubiera, lunghezza dell'espansione e livello di espansione)

| Tube | Expansion | | | Jaw | Cone | Tie-rod | Collar |
|-----------------------------|------------------|-----------------------------|------------|---------------|-----------------------------|-------------------|-------------------|
| <i>d_e</i> | <i>sp</i> | <i>d_j</i> | | | | | |
| inches mm | B.W.G | inches mm | inches mm | inches mm | Cod. | Cod. | Cod. |
| 11/2" (38,1) | 8 | 0.165 4,19 | 1.170 29,7 | 1.161 ÷ 1.280 | 29,5 ÷ 32,5 G21J-16 | | |
| | 10 | 0.134 3,40 | 1.232 31,3 | 1.240 ÷ 1.358 | 31,5 ÷ 34,5 G21J-17 | | |
| | 11 | 0.120 3,05 | 1.260 32,0 | 1.299 ÷ 1.417 | 33,0 ÷ 36,0 G21J-18 | G21C 16÷20 | G21T 16÷20 |
| | 12 | 0.109 2,77 | 1.282 32,5 | 1.358 ÷ 1.476 | 34,5 ÷ 37,5 G21J-19 | | TPC-41 |
| | 13 | 0.095 2,41 | 1.310 33,3 | 1.417 ÷ 1.535 | 36,0 ÷ 39,0 G21J-20 | | |
| | 14 | 0.083 2,11 | 1.334 33,9 | | | | |
| | 15 | 0.072 1,83 | 1.356 34,4 | | | | |
| | 16 | 0.065 1,65 | 1.370 34,8 | | | | |
| | 18 | 0.049 1,24 | 1.402 35,6 | | | | |
| | 19 | 0.042 1,07 | 1.416 35,9 | | | | |
| | 20 | 0.035 0,89 | 1.430 36,3 | | | | |
| | 22 | 0.028 0,71 | 1.444 36,7 | | | | |
| 1.3/4" (44,4) | 10 | 0.134 3,40 | 0.482 37,6 | 1.476 ÷ 1.594 | 37,5 ÷ 40,5 G21J-21 | | |
| | 11 | 0.120 3,05 | 1.510 38,3 | 1.555 ÷ 1.673 | 39,5 ÷ 42,5 G21J-22 | G21C 21÷26 | G21T 21÷26 |
| | 12 | 0.109 2,77 | 1.532 38,8 | 1.634 ÷ 1.752 | 41,5 ÷ 44,5 G21J-23 | | G21 TPC-48 |
| | 14 | 0.083 2,11 | 1.584 40,2 | | | | |
| | 15 | 0.072 1,83 | 1.606 40,7 | | | | |
| | 16 | 0.065 1,65 | 1.620 41,1 | | | | |
| | 18 | 0.049 1,24 | 1.652 41,9 | | | | |
| | 19 | 0.042 1,07 | 1.666 42,2 | | | | |
| | 20 | 0.035 0,89 | 1.680 42,6 | | | | |
| 2" (50,8) | 10 | 0.134 3,40 | 1.732 44,0 | 1.713 ÷ 1.831 | 43,5 ÷ 46,5 G21J- 24 | | |
| | 12 | 0.109 2,77 | 1.782 45,2 | 1.791 ÷ 1.909 | 45,5 ÷ 48,5 G21J-25 | G21C 21÷26 | G21T 21÷26 |
| | 13 | 0.095 2,41 | 1.810 46,0 | 1.870 ÷ 1.988 | 47,5 ÷ 50,5 G21J-26 | | G21 TPC-54 |
| | 14 | 0.083 2,11 | 1.834 46,6 | | | | |
| | 16 | 0.065 1,65 | 1.870 47,5 | | | | |
| | 18 | 0.049 1,24 | 1.884 47,8 | | | | |
| 2.1/2" (63,5) | 3 | 0.259 6,58 | 1.982 50,3 | 1.968 ÷ 2.087 | 50,0 ÷ 53,0 G21J- 27 | | |
| | 4 | 0.238 6,05 | 2.024 51,4 | 2.067 ÷ 2.185 | 52,5 ÷ 55,5 G21J- 28 | | |
| | 5 | 0.220 5,59 | 2.060 52,3 | 2.146 ÷ 2.205 | 54,5 ÷ 57,5 G21J- 29 | | |
| | 6 | 0.203 5,16 | 2.094 53,2 | 2.224 ÷ 2.343 | 56,5 ÷ 59,5 G21J-30 | G21C 27÷32 | G21T 27÷32 |
| | 7 | 0.180 4,57 | 2.140 54,3 | 2.303 ÷ 2.421 | 58,5 ÷ 61,5 G21J-31 | | G21 TPC-68 |
| | 9 | 0.148 4,76 | 2.204 56,0 | 2.382 ÷ 2.500 | 60,5 ÷ 63,5 G21J-32 | | |
| | 10 | 0.134 3,40 | 2.232 56,7 | | | | |
| | 11 | 0.120 3,05 | 2.260 57,4 | | | | |
| | 12 | 0.109 2,77 | 2.282 57,9 | | | | |
| | 14 | 0.083 2,11 | 2.334 59,3 | | | | |
| | 15 | 0.072 1,83 | 2.356 59,8 | | | | |
| | 16 | 0.065 1,65 | 2.370 60,2 | | | | |
| | 18 | 0.049 1,24 | 2.402 61,0 | | | | |

Dimensioni critiche dei tubi al limite della capacità di estrazione del Grippul 21 (20000 Kg / 44000 lb)
Dipende dal materiale del tubo e dall'espansione (con o senza canalini nella piastra tubiera, lunghezza dell'espansione e livello di espansione)

Heat exchanger's world

**MAUS ITALIA SPA IS THE WORLD LEADING MANUFACTURER OF TOOLS AND MACHINES
FOR THE PRODUCTION AND MAINTENANCE OF HEAT EXCHANGERS**



Maus Italia S.p.A.

SP 415 KM 30 (nuova strada di arocco)
26010 Bagnolo Cremasco (CR) Italy
PIVA: 00141010199

Telefono: +39 0373 2370

expo@mausitalia.it
www.mausitalia.it





mausitalia.it