



Quadrol MRP-EH

Hi-tech hydro-mechanically expansion system
for tube expanders with parallel rolls

Production

Tube rolling system



A winning story since 1961

The Beginning

At the end of the 1950s, Domenico Franco Agostino became the Italian representative of Albert Otto, a German manufacturer of tube expanders. In 1961 Franco Agostino's Albert Otto Italiana was founded and in 1972, after purchasing an area of 10,000 square metres in the municipality of Bagnolo Cremasco, Maus Italia Sas was established.

The Growth

In 1976 his son Stefano, a mechanical engineer, joined the company. Together with his father, he studied products, introduced new machinery onto the market and filed the first patents by Maus Italia. Above all, Stefano was firmly convinced that people are the very heart of a company's success. Therefore, he invested in human capital by valuing people and roles, and he surrounded himself with skilled operators as well as technical, commercial and administrative collaborators. The result was a winning, competent and proactive team.

His daughter Anna - also a mechanical engineer - has been working in the company since 2016, giving new impetus and energy to the business her father and grandfather had built.

Father and daughter work together side by side every day to guarantee the excellence of Maus Italia and support all customers worldwide with competence and passion: the company's distinctive traits.



Stefano Agostino

CEO - Mechanical Engineer

Anna Agostino

COO - Mechanical and Management Engineer



In-house production of each component ***Workshop 4.0 and 24/7 production control***

The production of Maus Italia branded items is entirely carried out in Bagnolo Cremasco, in the heart of an Italian industrial area 30 km southeast of Milan.

The company boasts a 4.0 workshop equipped with state-of-the-art machinery, an in-house heat treatment room and a final inspection department that allow Maus Italia to independently manage every phase of the manufacturing process of its wide range of products whilst maintaining high quality standards.



Quality first. ***Design and development***

One of Maus Italia's strengths is its willingness to understand its customers' needs.

Our technical department is always ready to find operational solutions to the most complex applications, even via feasibility studies. We develop accurate work processes, draw with FEM analyses to verify our mechanical-structural performance and optimise the manufacturing process of each component.

Ready To Deliver

A well-stocked and complete warehouse of finished products enables Maus Italia ship quickly to customers all over the world according to a ready-to-deliver logic.

The warehouse is fully located within our premises in Bagnolo Cremasco at controlled temperatures and conditions to guarantee the maximum safety and quality of Maus Italia products for all our customers.

Quality, environment and safety policy

Research, quality and safety are the watchwords of Maus Italia Spa.

Maus Italia has several projects underway aimed at increasingly sustainable development and integrates environmental concerns into its business model. The company's actions, behaviour and development choices are focused not only on the short run but rather mainly on a medium and long-term horizon.



Every day in over ***80 country*** ***worldwide***

Find an official distributor
in your country






Tube rolling

Comparison between “parallel rolls” tube expansion and traditional “inclined rolls” tube expansion

Traditional tube expanders have a “feeding angle” which, due the friction between the tube and rolls, generates an “auto-feeding” of the conical part of mandrel with the consequent expansion of the tube. The “auto-feeding” cannot be controlled, therefore it generates stress on the wall of the tube to be expanded.


Traditional tube expander



On the contrary with “Parallels Rolls” tube expanders, the feeding of the mandrel is hydraulically controlled by a system , regulated by the equipment QUADROL MRP-EH.

Since the mandrel feeding speed is controlled (it can be reduced or increased independently from the rotation of the mandrel) the result is high reduction of the stress of the expanded tubes.

Parallel roll tube expander




The working time is reduced: mandrel feeding speed can be increased during the first part of the expansion and reduced only during the final part of the expansion, once the tube wall thickness is effectively reduced.


One more advantage of parallel rolls expansion is the reduction of tube elongation (particularly for thin tubes), so, in case of tubes welded to the tube-sheet, it protects the integrity of the weld.

With the traditional expansion the expanded area takes the typical “barrel” shape, on the contrary with the parallel rolls, it takes the perfect “cylinder” shape.

“Barrel” shape



“Cylinder” shape



Parallel rolls expansion advantages

- High productivity
- Quality of the expanded product
- Reduction of the tubes elongation (particularly for thin tubes)
- Better quality of the contact between the tube and tubesheet by a perfect cylindrical expanded shape in the tube ID
- Reduction of residual internal stress
- Significant reduction of quantity of required tools

Quadrol MRP-EH


Hi-tech hydro-mechanically expansion system for tube expanders with *parallel rolls*

This systems is dedicated to expand the tubes wherever it is necessary to minimize tube elongation and its related stress for obtaining a perfect homogeneous contact between tube and tube-sheet along the entire expansion length.

The Quadrol MRP-EH is available in two models:

- **Quadrol MRP-EH-35** For external tubes diameter range from 9,50 to 25,40 mm (from 3/8" to 1")
- **Quadrol MRP-EH-100** For external tubes diameter range from 9,50 to 50,80 mm (from 3/8" to 2")

Parallel rolls

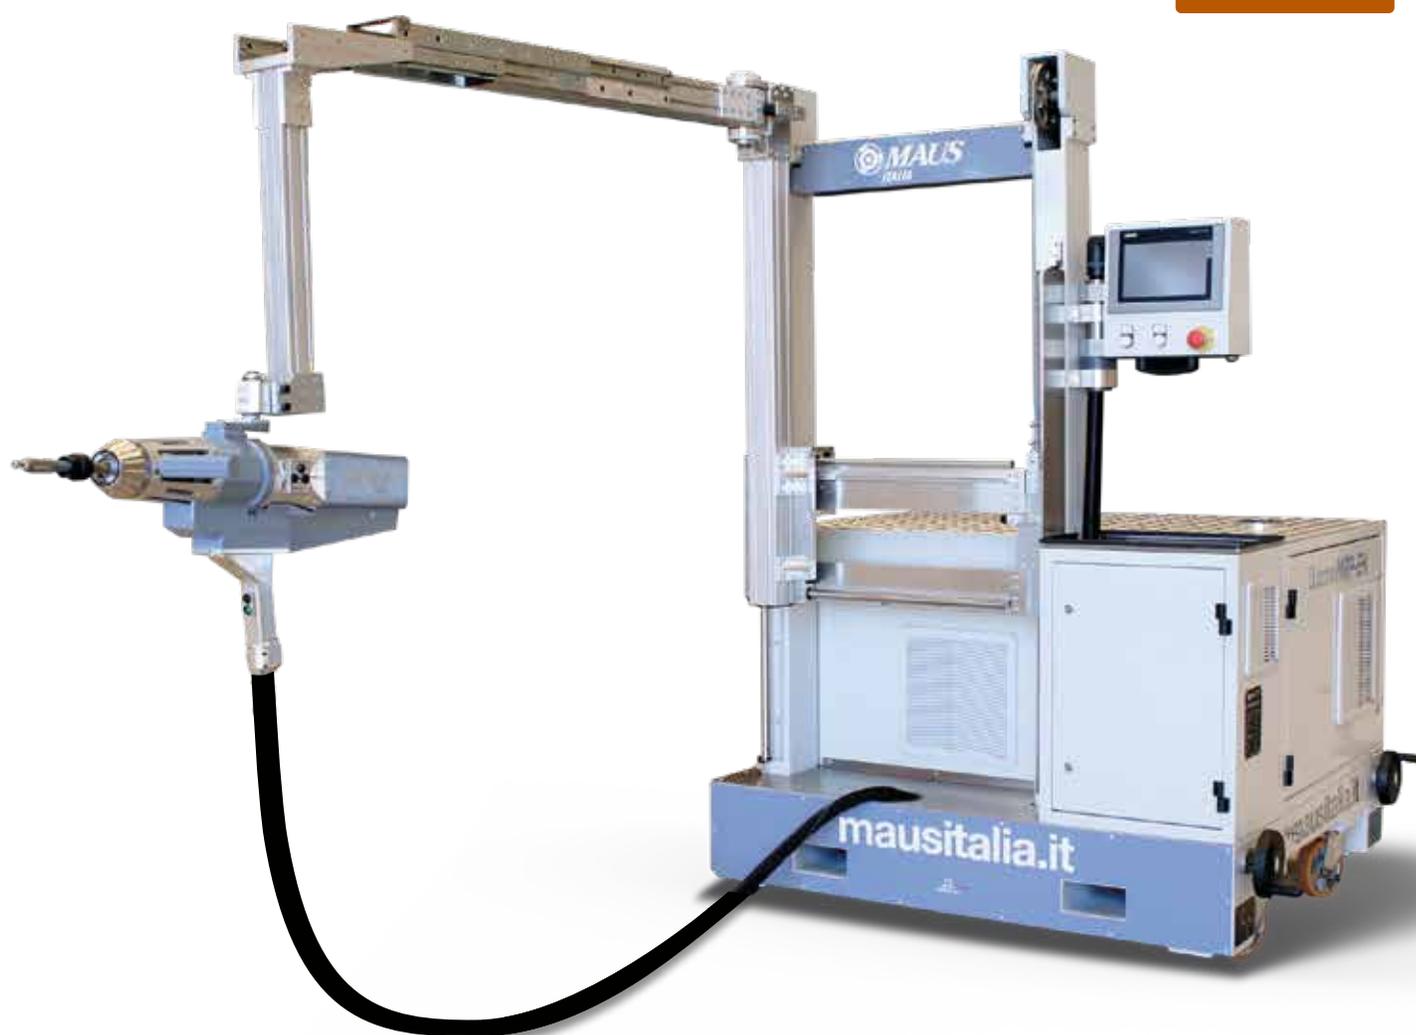

Quadrol MRP-EH exclusive features

The **Quadrol MRP-EH** system is for tube rolling where a very high precision is needed, the parallel rolls technology also prevent the tube elongation caused during the wall reduction and the relative stress in the tube.

Variable speed brushless low voltage motor is installed on the rolling head


Revolutionary dedicated sensor to control the expanded diameter

Possibility to control the mandrel feeding speed directly on the main controller

Articulated arm equipped with "zero gravity system"

Possibility to save the machine setting program on external memory support

Possibility to save expansion data report

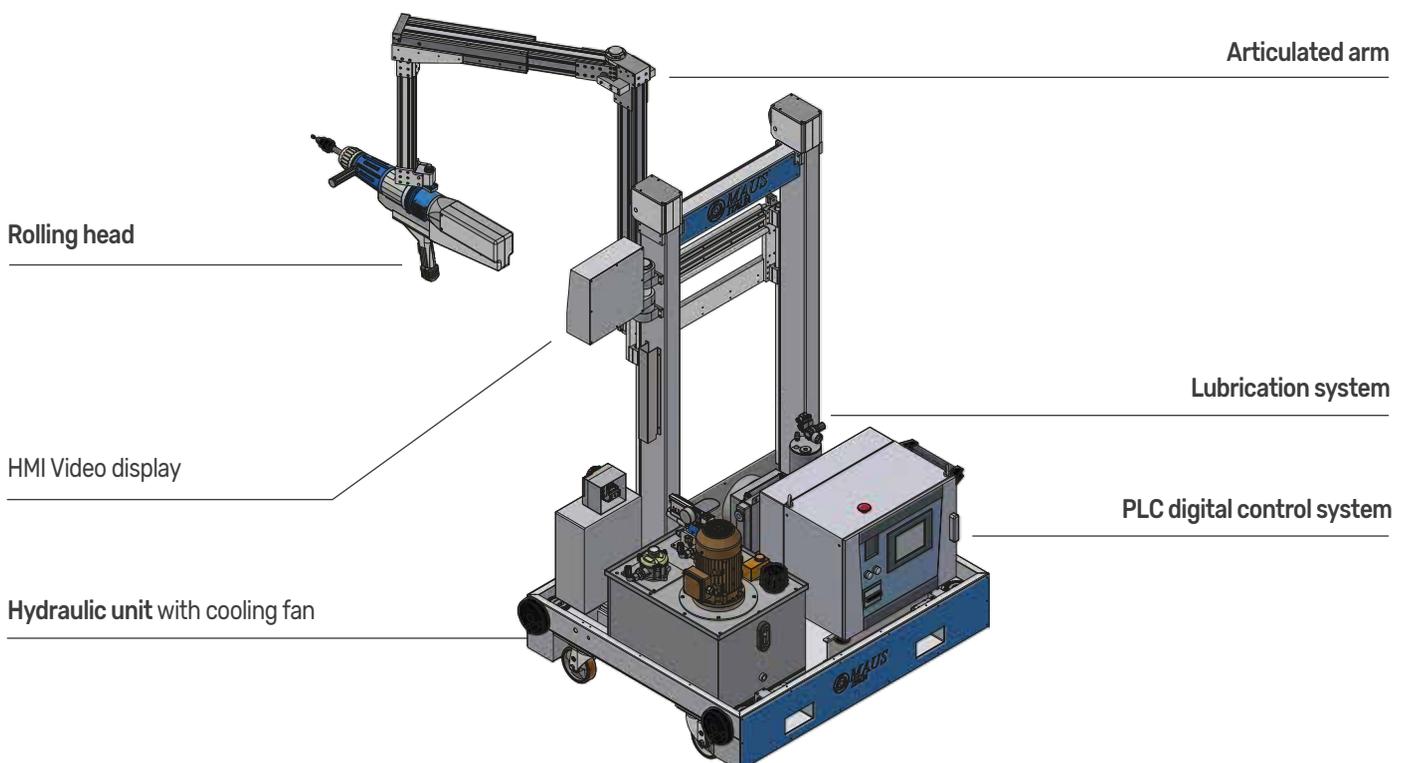

PLC digital control system

The PLC program measures the tube diameter after expansion to achieve an absolute precision of reached tube diameter and the end of rolling process.



Expansion torque value in Nm
Confirmation of reached the torque value
Tube inside diameter reached after expansion in mm



Digital calculation of nominal tube
Inside diameter after expansion
Considering the % of tube wall thickness reduction



Torque values settings:
Expansion torque phase "a"
Mandrel feeding during phase "a"
Expansion torque phase "b"
Mandrel feeding during phase "b"



Speed values setting:
Speed value phase "a"
Speed value phase "b"





Usefull USB port for data export and saving



Innovative rolling head


The new MRP-EH rolling head is composed by:

- brushless rolling motor
- hydraulic cylinder
- linear detector of mandrel position
- **remoted control buttons** for start/stop expansion cycle
- **quick adapter** for tube expander connection.

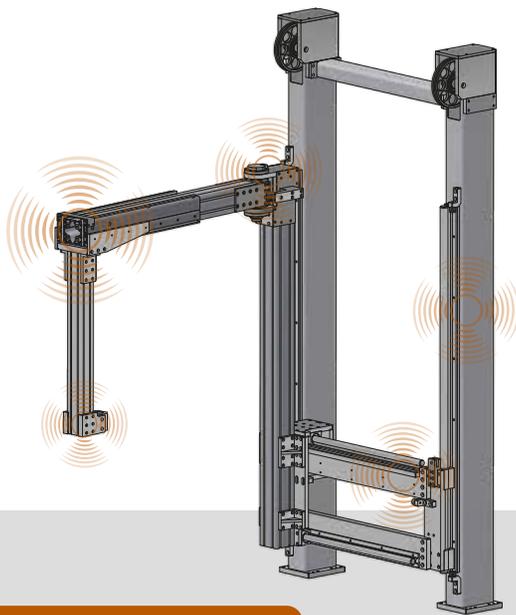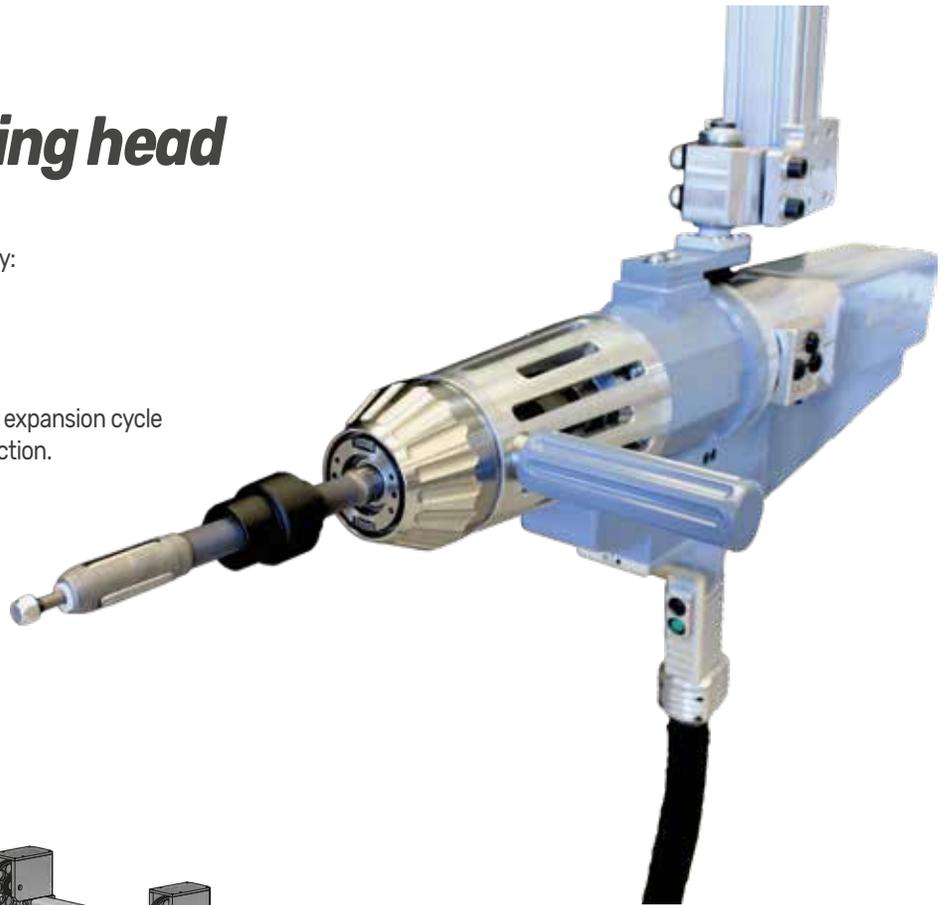


Zero gravity system

The articulated arm supports the weight of the rolling head and absorbs the torque generated during expansion, removing completely the operator effort and increasing the productivity.

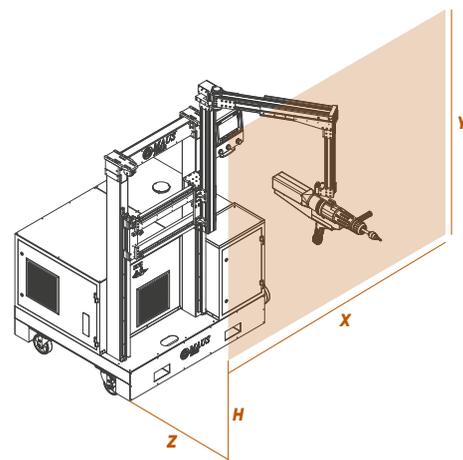

Articulate arm working area

X Range	mm / inches	1750 / 68.90
Y Range	mm / inches	820 / 32.28
H Minimum height	mm / inches	780 / 30.71
Z Stroke	mm / inches	500 / 19.69

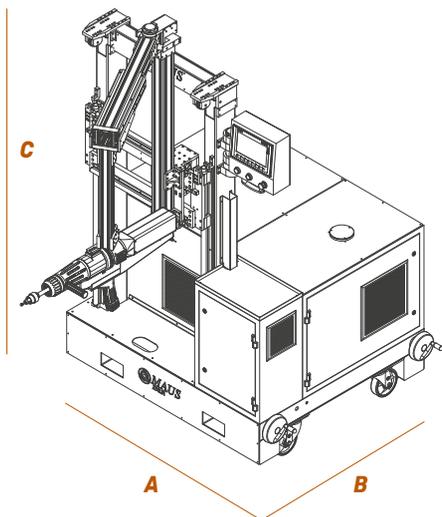

Technical details

Voltage	Volt - Ph
Frequency	Hz
Installed power	kW
IP	

Rolling head

Maximum torque	Nm (Ft.Lb)
Max tube outside diameter OD - Ferrous	mm (inches)
Motor voltage	V
Rotation speed	Rpm
Maximum mandrel feeding speed	mm/sec (inches/sec)
Mandrel square drive	mm (inches)

Hydraulic unit

Motor power	kW
Max pressure	bar (psi)

Air connection

Air pressure	bar (psi)
Air supply connection	

Dimensions

Length	A	mm / inches
Width	B	mm / inches
Height	C	mm / inches
Weight		Kg / Lbs

Shipping dimension of the crate

Length	A	mm / inches
Width	B	mm / inches
Height	C	mm / inches
Shipping weight		Kg / Lbs

Quadrol MRP-EH-35

400-3 phases
50/60
5
55

35 (25.8)
up to 31,8 (1.1/4")
48
up to 600
8,0 (0.31)
9,5 (3/8")

1,5
120

6,3 (92)
Male quick adapter 1/4"

1450 / 57.1
1350 / 53.2
2100 / 82.7
700 / 1543

1570 / 61.8
1480 / 58.0
2340 / 92.0
1100 Kgs / 2425

Quadrol MRP-EH-100

400-3 phases
50/60
5
55

100 (73.8)
up to 57,1 (2.1/4")
48
up to 600
8,0 (0.31)
9,5 (3/8")

1,5
120

6,3 (92)
Male quick adapter 1/4"

1450 / 57.1
1350 / 53.2
2100 / 82.7
700 / 1543

1570 / 61.8
1480 / 58.0
2340 / 92.0
1100 Kgs / 2425

Heat exchanger's world

MAUS ITALIA SPA IS THE WORLD LEADING MANUFACTURER OF TOOLS AND MACHINES FOR THE PRODUCTION AND MAINTENANCE OF HEAT EXCHANGERS




Maus Italia S.p.A.

SP 415 KM 30 (nuova strada di arrocco)
26010 Bagnolo Cremasco (CR) Italy
PIVA: 00141010199

Telefono: +39 0373 2370

expo@mausitalia.it
www.mausitalia.it

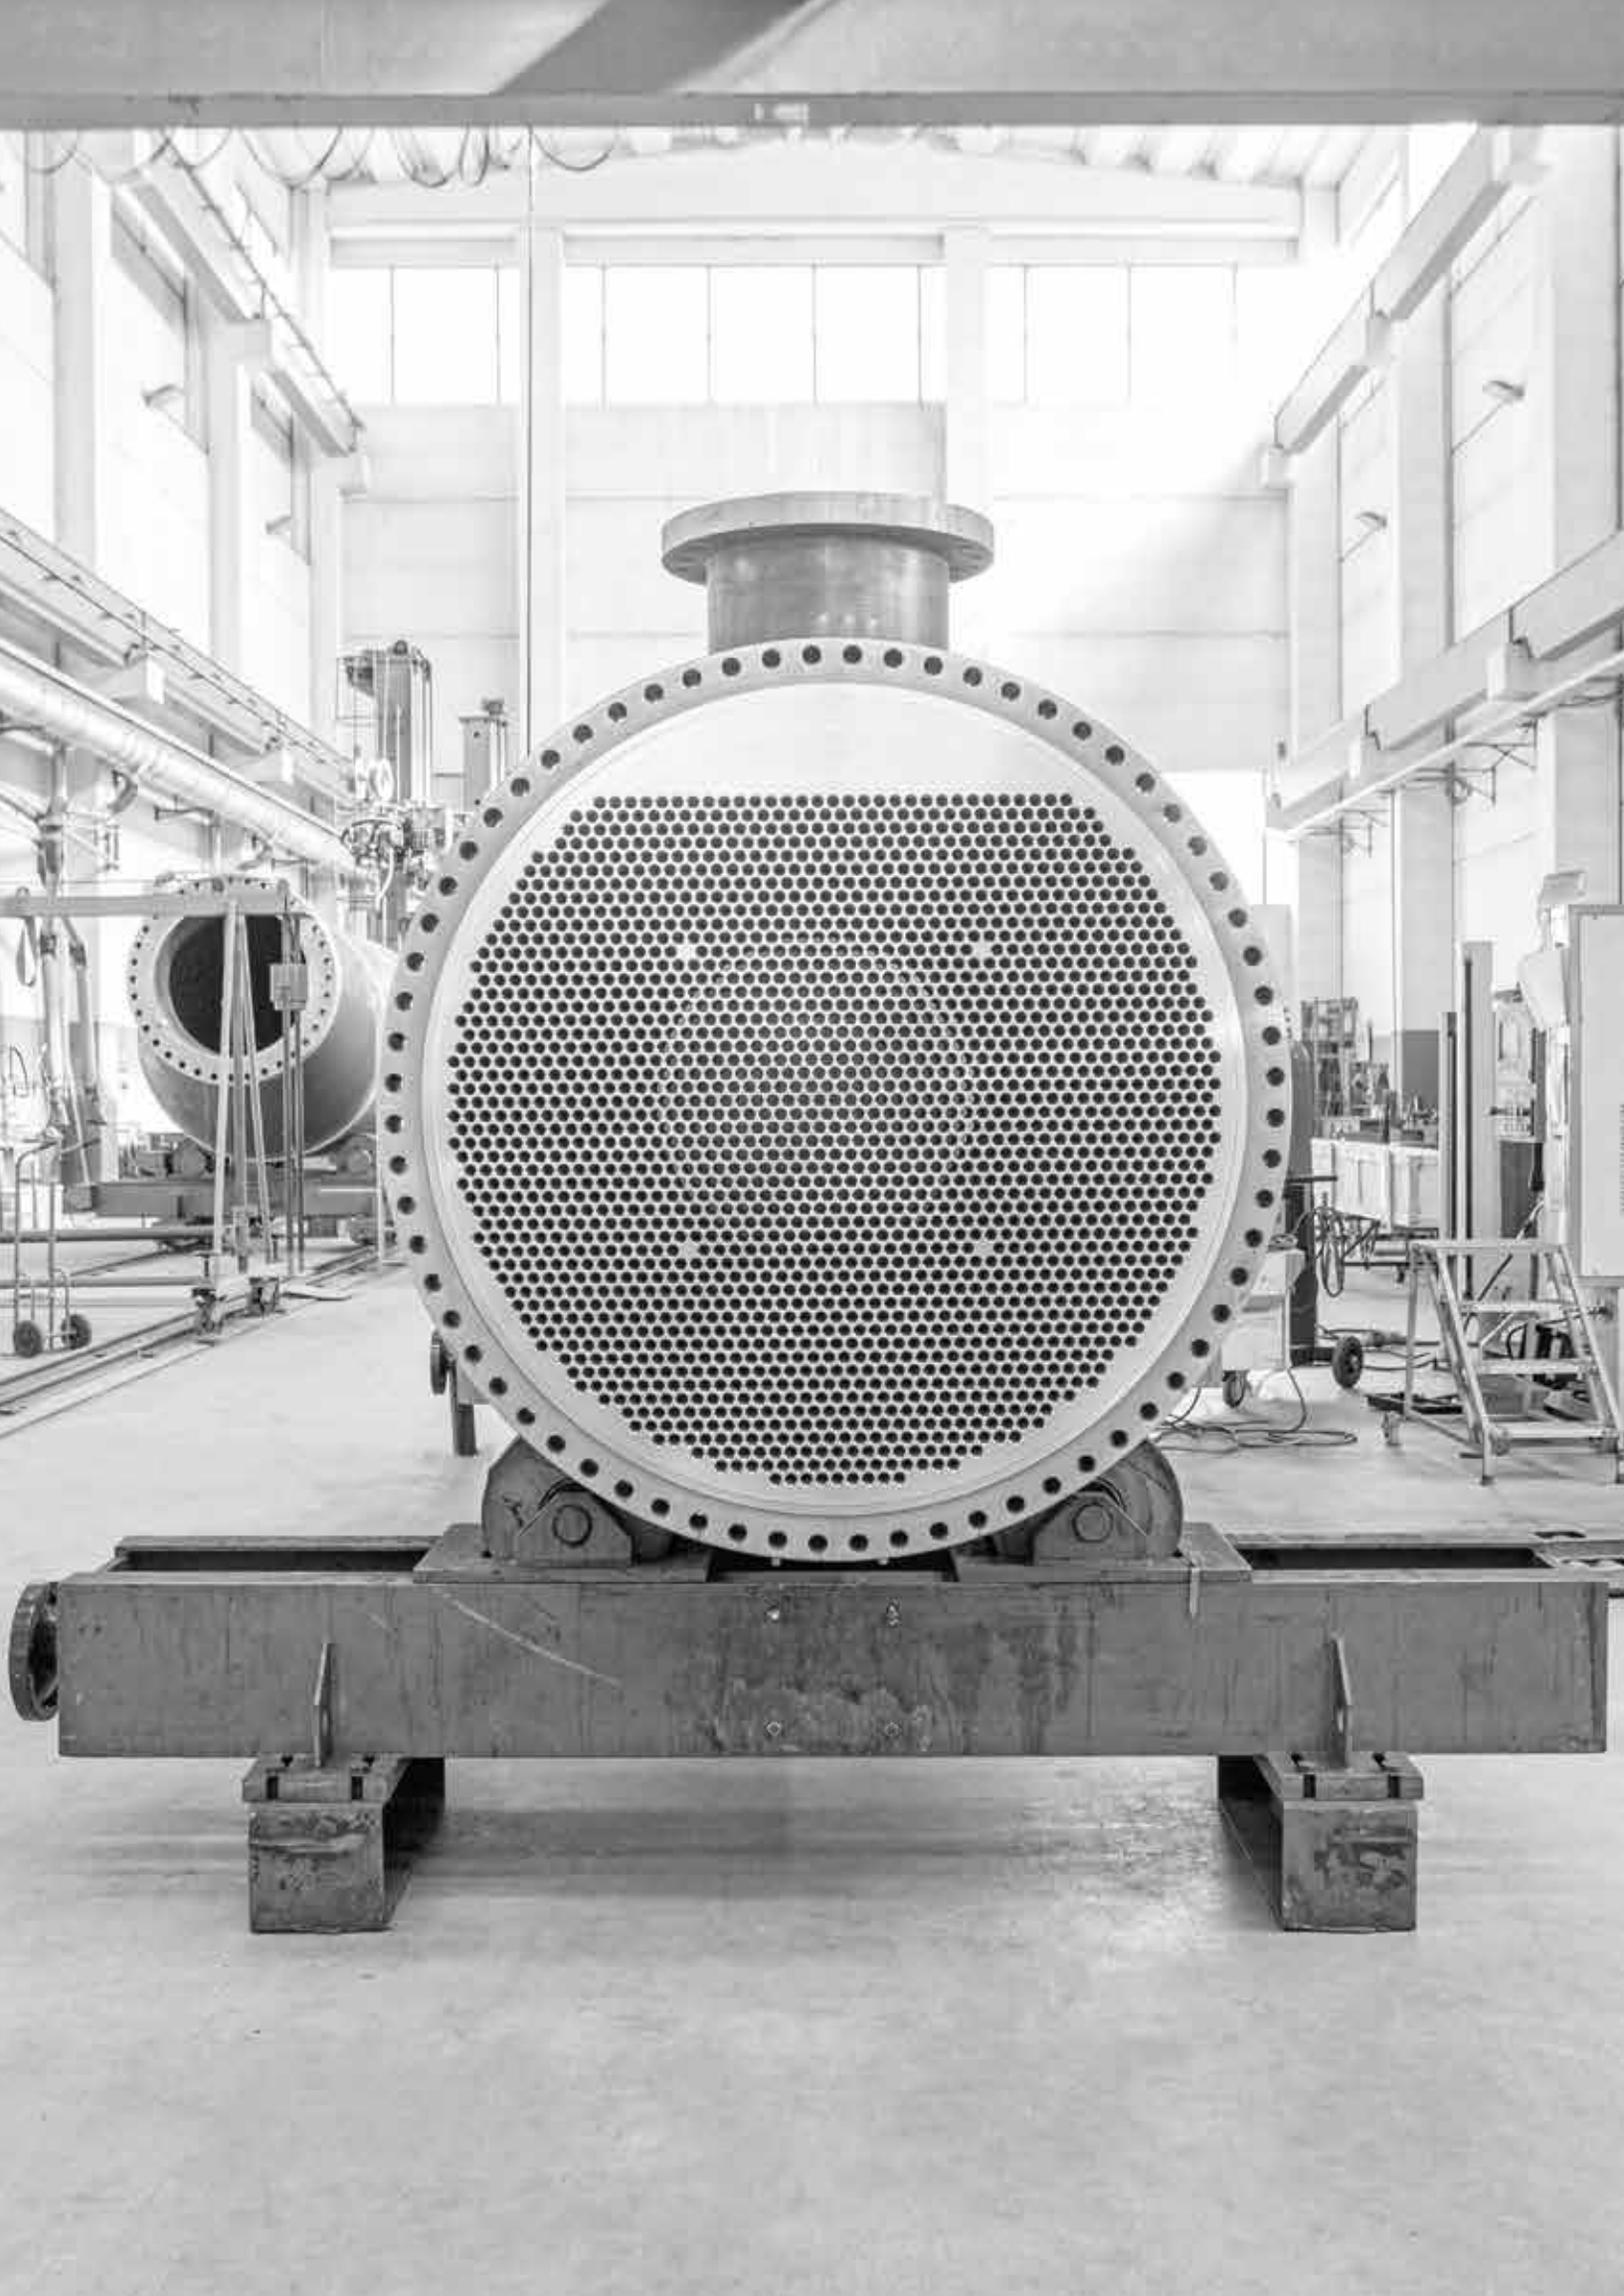



mausitalia.it